



VELOX[®]

**Chipboard &
Construction screws**

NEW
FASTER AND
STRONGER



VELOX® screws: With a true passion for details


No splitting



For highest requirements



Flush finishing in wood and metal fittings

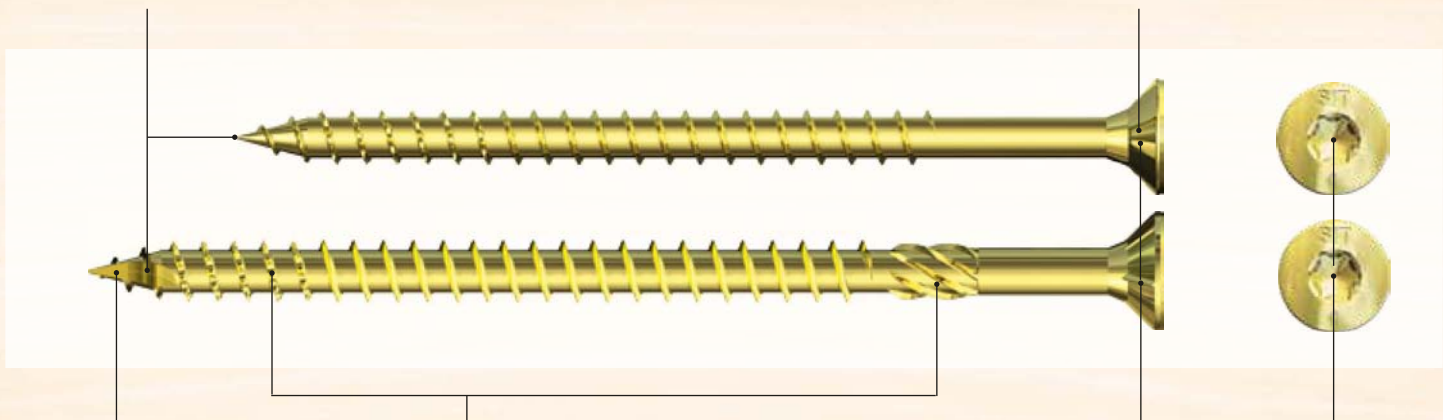

Quick bite

Reduced setting torque

Flush finishing in wood

Perfect power transfer, low wear, and tight fit on the bit



The packaging

Like the Apolo MEA packaging, the VELOX® box is a robust box with window and colour code system.

NEW: the SIT®-recess

- precise
- faster
- perfect power transfer
- only one bit size for four screw diameters

Ø	Bit size	Advantages
3,0	10	} 1 bit for 4 screw diameters No changing of bits
3,5	20	
4,0	20	
4,5	20	
5,0*	20	
6,0	30	
8,0	40	

*for stainless steel: SIT 25






VELOX® – full speed ahead

VELOX® SIT




- SIT® recess (= AW recess from Würth)
- Perfect power transfer
- Long-lasting SIT bit
- No damage to the screw head
- Large improved working comfort; the conical recess centers the screw (no tumbling) and sticks on the bit
- TX bits can also be used, but without the mentioned advantages
- Patented tip thread area, shank cutter, notch tip (ø 8 mm)
- Underhead milling ribs and underhead milling pockets: perfect for wood and metal fittings
- Only one bit size for four screw diameters

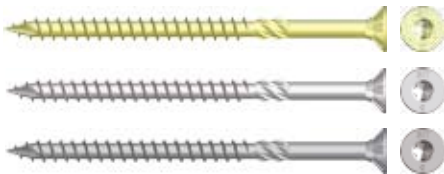

VELOX® screws - approved product for your security

VELOX® Pozi

- Patented tip thread area reduces splitting as well as setting torque, which provides a perfect appearance and a longer battery life
- Underhead milling ribs and underhead milling pockets



VELOX® B with Pan-Head

- Patented tip thread area reduces splitting as well as setting torque
- Pan-Head



VELOX® Quick with sharp cutting tip

- Sharp cutting tip for low splitting tendency and therefore small edge distance
- Designed especially for work with MDF boards



Pole-Position for our Newcomer



VELOX® SIT

ø 3-4,5 mm



VELOX® SIT
yellow zinc plated



VELOX® SIT
blue zinc plated



VELOX® SIT
stainless steel A2

V = full thread; values indicate thread length
L_{TH} (in mm) for screws with partial thread
*not part of the approval



ø	Length	L _{TH}	VELOX® SIT yellow zinc plated			blue zinc plated		stainless steel A2		
			Art-No	Pcs	Art-No (Small pack)	Pcs	Art-No	Pcs	Art-No	Pcs
3	13*	V	9B313VLOXS	1000			9313VLOXS	1000		
	15*	V	9B315VLOXS	1000	9B315VLOXS300	300	9315VLOXS	1000		
	17	V	9B317VLOXS	1000	9B317VLOXS300	300	9317VLOXS	1000		
	20	V	9B320VLOXS	1000	9B320VLOXS300	300	9320VLOXS	1000	9X320VLOXS	1000
	25	V	9B325VLOXS	1000	9B325VLOXS300	300	9325VLOXS	1000		
	30	V	9B330VLOXS	1000	9B330VLOXS300	300	9330VLOXS	1000	9X330VLOXS	1000
	35	20	9B335VLOXSP	1000			9335VLOXSP	1000		
3,5	15*	V	9B3515VLOXS	1000			93515VLOXS	1000	9X3515VLOXS	1000
	17*	V	9B3517VLOXS	1000			93517VLOXS	1000		
	20	V	9B3520VLOXS	1000			93520VLOXS	1000	9X3520VLOXS	1000
	25	V	9B3525VLOXS	1000	9B3525VLOXS300	300	93525VLOXS	1000	9X3525VLOXS	1000
	30	V	9B3530VLOXS	1000	9B3530VLOXS200	200	93530VLOXS	1000	9X3530VLOXS	1000
	35	20	9B3535VLOXSP	500			93535VLOXSP	500		
	35	V	9B3535VLOXS	500	9B3535VLOXS200	200	93535VLOXS	500		
4	40	25	9B3540VLOXSP	500	9B3540VLOXSP200	200	93540VLOXSP	500	9X3540VLOXSP	500
	45	30	9B3545VLOXSP	500	9B3545VLOXSP200	200	93545VLOXSP	500		
	50	30	9B3550VLOXSP	500	9B3550VLOXSP200	200	93550VLOXSP	500		
	17*	V	9B417VLOXS	1000			9417VLOXS	1000		
	20*	V	9B420VLOXS	1000	9B420VLOXS200	200	9420VLOXS	1000	9X420VLOXS	1000
	25	V	9B425VLOXS	1000	9B425VLOXS200	200	9425VLOXS	1000	9X425VLOXS	1000
	30	V	9B430VLOXS	500	9B430VLOXS200	200	9430VLOXS	500	9X430VLOXS	500
4,5	35	V	9B435VLOXS	500	9B435VLOXS200	200	9435VLOXS	500	9X435VLOXS	500
	40	25	9B440VLOXSP	500	9B440VLOXSP200	200	9440VLOXSP	500	9X440VLOXSP	500
	40	V	9B440VLOXS	500	9B440VLOXS200	200	9440VLOXS	500		
	45	30	9B445VLOXSP	500	9B445VLOXSP200	200	9445VLOXSP	500		
	45	V	9B445VLOXS	500	9B445VLOXS200	200	9445VLOXS	500		
	50	30	9B450VLOXSP	500	9B450VLOXSP200	200	9450VLOXSP	500	9X450VLOXSP	500
	50	V	9B450VLOXS	500	9B450VLOXS200	200	9450VLOXS	500		
	60	35	9B460VLOXSP	250			9460VLOXSP	250	9X460VLOXSP	250
	60	V	9B460VLOXS	250			9460VLOXS	250		
	70	40	9B470VLOXSP	200			9470VLOXSP	200		
4,5	30	V	9B4530VLOXS	500	9B4530VLOXS200	200	94530VLOXS	500	9X4530VLOXS	500
	35	V	9B4535VLOXS	500	9B4535VLOXS200	200	94535VLOXS	500		
	40	25	9B4540VLOXSP	500	9B4540VLOXSP200	200	94540VLOXSP	500	9X4540VLOXSP	500
	40	V	9B4540VLOXS	500	9B4540VLOXS200	200	94540VLOXS	500	9X4540VLOXS	500
	45	30	9B4545VLOXSP	250			94545VLOXSP	250		
	45	V	9B4545VLOXS	250			94545VLOXS	250		
	50	30	9B4550VLOXSP	250			94550VLOXSP	250	9X4550VLOXSP	250
	50	V	9B4550VLOXS	250			94550VLOXS	250		
	60	35	9B4560VLOXSP	250			94560VLOXSP	250	9X4560VLOXSP	250
	70	40	9B4570VLOXSP	200			94570VLOXSP	200	9X4570VLOXSP	200
80	50	9B4580VLOXSP	100			94580VLOXSP	100			

Pole-Position for our Newcomer



VELOX® SIT

Ø 5-8 mm



VELOX® SIT
yellow zinc plated



VELOX® SIT
blue zinc plated



VELOX® SIT
stainless steel A2

V = full thread; values indicate thread length
L_{TH} (in mm) for screws with partial thread

*not part of the approval



Ø	Length	L _{TH}	VELOX® SIT yellow zinc plated			blue zinc plated		stainless steel A2		
			Art-No	Pcs	Art-No (small pack)	Pcs	Art-No	Pcs		
5	30	V	9B530VLOXS	250			9530VLOXS	250		
	35	V	9B535VLOXS	250			9535VLOXS	250		
	40	25	9B540VLOXSP	500			9540VLOXSP	500	9X540VLOXSP	500
	45	30	9B545VLOXSP	250			9545VLOXSP	250		
	50	30	9B550VLOXSP	250			9550VLOXSP	250	9X550VLOXSP	250
	50	V	9B550VLOXS	250			9550VLOXS	250		
	60	35	9B560VLOXSP	250			9560VLOXSP	250	9X560VLOXSP	250
	60	V	9B560VLOXS	250			9560VLOXS	250		
	70	40	9B570VLOXSP	200			9570VLOXSP	200	9X570VLOXSP	200
	70	V	9B570VLOXS	200			9570VLOXS	200		
	80	60	9B580VLOXSP	100			9580VLOXSP	100	9X580VLOXSP	100
	80	V	9B580VLOXS	100			9580VLOXS	100		
90	60	9B590VLOXSP	100			9590VLOXSP	100	9X590VLOXSP	100	
100	60	9B5100VLOXSP	50			95100VLOXSP	50	9X5100VLOXSP	50	
6	40	V	9B640VLOXS	250						
	50	30	9B650VLOXSP	250					9X650VLOXSP	250
	50	V	9B650VLOXS	250						
	60	35	9B660VLOXSP	200					9X660VLOXSP	200
	60	V	9B660VLOXS	200						
	70	40	9B670VLOXSP	100					9X670VLOXSP	100
	70	V	9B670VLOXS	100						
	80	50	9B680VLOXSP	100					9X680VLOXSP	100
	80	V	9B680VLOXS	100						
	90	60	9B690VLOXSP	50					9X690VLOXSP	50
	100	60	9B6100VLOXSP	50					9X6100VLOXSP	50
	120	60	9B6120VLOXSP	100					9X6120VLOXSP	100
140	70	9B6140VLOXSP	100							
160	70	9B6160VLOXSP	100							
180	70	9B6180VLOXSP	100							
200	70	9B6200VLOXSP	100							
220	70	9B6220VLOXSP	100							
8	80	50	9B880VLOXSP	100						
	100	60	9B8100VLOXSP	100						
	120	70	9B8120VLOXSP	100						
	140	70	9B8140VLOXSP	50						
	160	100	9B8160VLOXSP	50						
	180	100	9B8180VLOXSP	50						
	200	100	9B8200VLOXSP	50						
	220	100	9B8220VLOXSP	50						
	240	100	9B8240VLOXSP	50						
	260	100	9B8260VLOXSP	50						
	280	100	9B8280VLOXSP	50						
	300	100	9B8300VLOXSP	50						
340	100	9B8340VLOXSP	50							



VELOX® Pozi

ø 3-4,5 mm



VELOX® Pozi
yellow zinc plated



VELOX® Pozi
blue zinc plated



VELOX® B
blue zinc plated, Pan-Head



VELOX® Quick
blue zinc plated

V = full thread; values indicate thread length
L_{TH} (in mm) for screws with partial thread
*not part of the approval



ø	Length	L _{TH}	VELOX®Pozi yellow zinc plated				blue zinc plated		VELOX®B		VELOX®Quick	
			Art-No	Pcs	Art-No (small pack)	Pcs	Art-No	Pcs	Art-No	Pcs	Art-No	Pcs
3	13*	V	9B313VLOX	1000			9313VLOX	1000				
	15*	V	9B315VLOX	1000	9B315VLOX300	300	9315VLOX	1000	9315VLOXB	1000		
	17	V	9B317VLOX	1000	9B317VLOX300	300	9317VLOX	1000				
	20	V	9B320VLOX	1000	9B320VLOX300	300	9320VLOX	1000	9320VLOXB	1000		
	25	V	9B325VLOX	1000	9B325VLOX300	300	9325VLOX	1000				
	30	V	9B330VLOX	1000	9B330VLOX300	300	9330VLOX	1000				
3,5	35	20										
	15*	V	9B3515VLOX	1000			93515VLOX	1000				
	17*	V	9B3517VLOX	1000			93517VLOX	1000				
	20	V	9B3520VLOX	1000			93520VLOX	1000	93520VLOXB	1000		
	25	V	9B3525VLOX	1000	9B3525VLOX300	300	93525VLOX	1000	93525VLOXB	1000		
	30	V	9B3530VLOX	1000	9B3530VLOX200	200	93530VLOX	1000	93530VLOXB	1000		
	35	20	9B3535VLOXP	500			93535VLOXP	500				
	35	V	9B3535VLOX	500	9B3535VLOX200	200	93535VLOX	500	93535VLOXB	500		
	40	25	9B3540VLOXP	500	9B3540VLOXP200	200	93540VLOXP	500	93540VLOXB	500		
	45	30	9B3545VLOXP	500	9B3545VLOXP200	200	93545VLOXP	500				
4	50	30	9B3550VLOXP	500	9B3550VLOXP200	200	93550VLOXP	500			93550VLOXQ	500
	15	V							9415VLOXB	1000		
	17*	V	9B417VLOX	1000			9417VLOX	1000				
	20*	V	9B420VLOX	1000	9B420VLOX200	200	9420VLOX	1000	9420VLOXB	1000		
	25	V	9B425VLOX	1000	9B425VLOX200	200	9425VLOX	1000				
	30	V	9B430VLOX	500	9B430VLOX200	200	9430VLOX	500	9430VLOXB	500	9430VLOXQ	500
	35	V	9B435VLOX	500	9B435VLOX200	200	9435VLOX	500	9435VLOXB	500		
	40	25	9B440VLOXP	500	9B440VLOXP200	200	9440VLOXP	500				
	40	V	9B440VLOX	500	9B440VLOX200	200	9440VLOX	500	9440VLOXB	500	9440VLOXQ	500
	45	30	9B445VLOXP	500	9B445VLOXP200	200	9445VLOXP	500				
	45	V	9B445VLOX	500	9B445VLOX200	200	9445VLOX	500			9445VLOXQ	500
	50	30	9B450VLOXP	500	9B450VLOXP200	200	9450VLOXP	500				
	50	V	9B450VLOX	500	9B450VLOX200	200	9450VLOX	500	9450VLOXB	250	9450VLOXQ	500
	60	35	9B460VLOXP	250			9460VLOXP	250				
60	V	9B460VLOX	250			9460VLOX	250	9460VLOXB	250	9460VLOXQ	250	
70	40	9B470VLOXP	200			9470VLOXP	200					
4,5	30	V	9B4530VLOX	500	9B4530VLOX200	200	94530VLOX	500	94530VLOXB	500		
	35	V	9B4535VLOX	500	9B4535VLOX200	200	94535VLOX	500	94535VLOXB	500		
	40	25	9B4540VLOXP	500	9B4540VLOXP200	200	94540VLOXP	500	94540VLOXB	500		
	40	V	9B4540VLOX	500	9B4540VLOX200	200	94540VLOX	500				
	45	30	9B4545VLOXP	250			94545VLOXP	250	94545VLOXB	250		
	45	V	9B4545VLOX	250			94545VLOX	250				
	50	30	9B4550VLOXP	250			94550VLOXP	250	94550VLOXB	250		
	50	V	9B4550VLOX	250			94550VLOX	250				
	60	35	9B4560VLOXP	250			94560VLOXP	250				
	70	40	9B4570VLOXP	200			94570VLOXP	200				
80	50	9B4580VLOXP	100			94580VLOXP	100					



VELOX® Pozi

ø 5-6 mm



VELOX® Pozi
yellow zinc plated



VELOX® Pozi
blue zinc plated



VELOX® B
blue zinc plated, Pan-Head



VELOX® Quick
blue zinc plated

ø	Length	L _{Th}	VELOX®Pozi yellow zinc plated			blue zinc plated		VELOX®B		VELOX®Quick	
			Art-No	Pcs	Art-No (Small pack)	Pcs	Art-No	Pcs	Art-No	Pcs	
5	25	V						9525VLOXB	500		
	30	V	9B530VLOX	250			9530VLOX	250	9530VLOXB	250	
	35	V	9B535VLOX	250			9535VLOX	250	9535VLOXB	250	
	40	25	9B540VLOXP	500			9540VLOXP	500	9540VLOXB	250	
	45	30	9B545VLOXP	250			9545VLOXP	250			
	50	30	9B550VLOXP	250			9550VLOXP	250			
	50	V	9B550VLOX	250			9550VLOX	250			
	60	35	9B560VLOXP	250			9560VLOXP	250			
	60	V	9B560VLOX	250			9560VLOX	250			
	70	40	9B570VLOXP	200			9570VLOXP	200			
	70	V	9B570VLOX	200			9570VLOX	200			
	80	50	9B580VLOXP	100			9580VLOXP	100			
	80	V	9B580VLOX	100			9580VLOX	100			
6	90	60	9B590VLOXP	100			9590VLOXP	100			
	100	60	9B5100VLOXP	50			95100VLOXP	50			
	40	V	9B640VLOX	250							
	50	30	9B650VLOXP	250							
	50	V	9B650VLOX	250							
	60	35	9B660VLOXP	200							
	60	V	9B660VLOX	200							
	70	40	9B670VLOXP	100							
	70	V	9B670VLOX	100							
	80	50	9B680VLOXP	100							
	80	V	9B680VLOX	100							
	90	60	9B690VLOXP	50							
	100	60	9B6100VLOXP	50							
120	70	9B6120VLOXP	100								
140	70	9B6140VLOXP	100								
160	70	9B6160VLOXP	100								
180	70	9B6180VLOXP	100								
200	70	9B6200VLOXP	100								
220	70	9B6220VLOXP	100								

V = full thread; values indicate thread length L_{Th} (in mm) for screws with partial thread

**Trust in the premier class champions:
Use the professional screw assortment
VELOX® of CELO!**

A strong team – internationally successful

Grupo CELO with its three strong brands Apolo MEA, CELO and Apolo, is an internationally very successful family business. The group operates worldwide 13 sales and marketing organizations, 7 logistics centers and 3 production sites.

Innovative developments, technical experience in fastening systems and high quality standards - that's why Grupo CELO is your competent partner for effective and efficient fixings.

With the new VELOX® screw assortment CELO offers you premium class chipboard and construction screws with an European Technical Approval – for your successful project.



✓ Screws



- ✓ Electrical fixings
- ✓ Sanitary fixings
- ✓ Gas actuated systems



- ✓ Light duty fixings
- ✓ Heavy duty fixings
- ✓ Chemical fastening systems





In our current catalogue you can find further screws and fastening systems.

Ask your nearest dealer or visit us at

www.apolofixing.com.

Contact and pit stop

Sale and marketing of VELOX® screws in Germany

via:

Apolo MEA Befestigungssysteme GmbH

Industriestraße 6


D-86551 Aichach

www.apolofixing.com

Hotline: +49 (0) 8251-90485-0

Telefax: +49 (0) 8251-90485-49

E-Mail: info@apolofixing.com

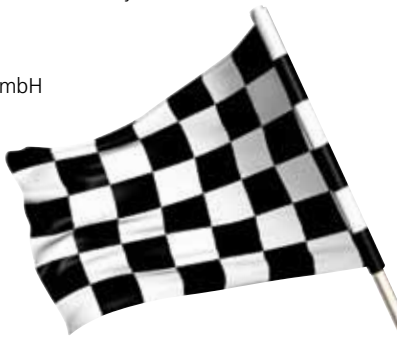

apolo MEA
Fixing Technology

Presented by: