**BENEFITS**

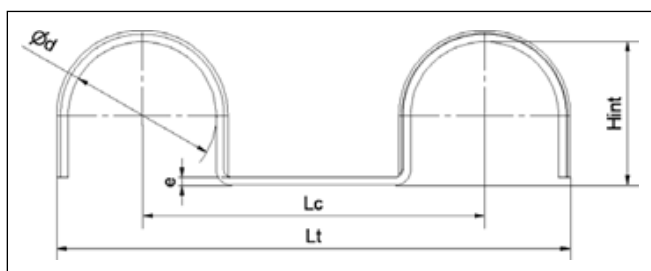
- Central plastic anti-rotation clip for direct fixing with AG gas nailers.
- Metal clip for pipe and cable fixing.
- Fast installation in two steps with gas nailer for concrete. Only shoot and install the cables.
- It has two reinforcement ribs along the clip.
- Material: Made by soft steel.
- White zinc plated coating (minimum 5 microns).

BASE MATERIALS

- Concrete
- Concrete block
- Hollow brick
- Steel

INSTALLATION PROCEDURE

Direct fixing using concrete gas Mailer.

MAIN DIMENSIONS [mm]

ref.	L _{tot}	L _c	Ød	H _{int}	e
DFT-5	34	29.5	4.5	3.8	1
DFT-6	37	31	6	5.5	
DFT-8	40	32.5	7.5	7	
DFT-10	44	34.5	9.5	9	
DFT-12	48	36.5	11.5	11	

PIPES RAGE

ref.	PIPES	
	Cooper	Cable
DFT-5	5	
DFT-6	6	1x1,5 / 1x2,5
DFT-8	8	1x6 / 1x10
DFT-10	10	1x16 / 1x25 / 2x2,5 / 3x1,5 / 4x1,5
DFT-12	12	1x25 / 1x / 2x4 / 3x2,5 / 3x4 / 4x1,5 / 4x2,5

INSTALLATION PARAMETERS

Material		Concrete	Concrete block	Steel
Minimum spacing distance	S _{min} (mm)	40	40	40
Minimum edge distance	C _{min} (mm)	75	100	25
Minimum thickness	h _{min} (mm)	100	35	3,5

RECOMMENDED LOADS

Resistance: 6-10kg according to each size*

(*) The breakage resistance of the clamp is smaller than the resistance of nail.

APPLICATIONS

Electrical installation

