



### BASE MATERIAL

- Concrete
- Concrete block
- Solid brick
- Steel




### HOMOLOGATIONS



### INSTALLATION PROCEDURE


Direct fixing using concrete gas nailer.

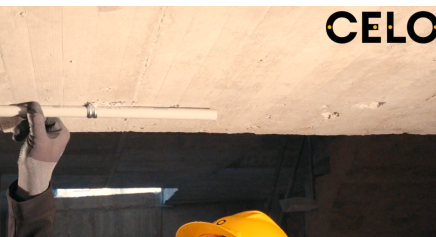

### FEATURES

- Central plastic anti-rotation clip for direct fixing with FORCE ONE and FOX.
- Metal clip for pipe and cable fixing.
- Fast installation in two steps with gas nailer for concrete. Only shoot and install the cable.
- it has two reinforcement ribs along the clip.
- Material: Made by soft steel.
- Coating: white zinc plated coating [minimum 5 microns].

### MAIN DIMENSIONS (mm)

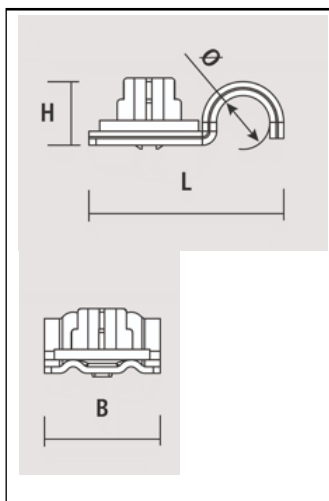

Ref.	Ø	H	L	B
PFT-5	4,5	3,8	24	17
PFT-6	6,0	5,5	26	
PFT-7	6,5	6	26,5	
PFT-8	7,5	7	27,5	
PFT-10	9,5	9	29,5	
PFT-12	11,5	11,5	31,5	
PFT-14	13,5	13,5	33,5	
PFT-16	15,5	15,0	34,5	
PFT-18	17,5	17,0	36,5	
PFT-20	19,5	18,5	38,5	
PFT-22	21,5	20,5	40,5	
PFT-25	24,5	23,5	43,5	
PFT-28	27,5	26,5	46,5	
PFT-32	31,5	30,5	50,5	
PFT-40	39,5	38,5	58,5	
PFT-50	49,5	48,5	68,5	

### RANGE OF PIPE OR CABLE

Ref.	TUBOS			
	Cobre	Plástico	Tubo enfundado	Cable
PFT-5	-	-	-	1x1.5 / 2x0.75
PFT-6	6	-	-	1x1,5 / 1x2,5
PFT-7	-	-	-	1x1,5 / hasta / 1x6
PFT-8	8	-	-	1x6 / 1x10
PFT-10	10	-	-	1x16 / hasta / 4x1,5
PFT-12	12	-	-	1x25 / hasta / 4x2,5
PFT-14	15	-	-	4x6
PFT-16	-	16	-	-
PFT-18	18	-	19	-
PFT-20	-	20	-	-
PFT-22	22	-	23	-
PFT-25	-	25	-	-
PFT-28	28	-	29	-
PFT-32	35	32	-	-
PFT-40	42	40	-	-
PFT-50	-	50	-	-

### RECOMMENDED LOADS

Resistance: 6-10 kg according to each size\*

(\*) The breakage resistance of the clip is smaller than the resistance of nail.

Small Things Matter

## INSTALLATION PARAMETERS

Material		Concrete	Concrete block	Steel
Minimum spacing distance	$S_{min}$ (mm)	40	40	40
Minimum edge distance	$C_{min}$ (mm)	75	100	25
Minimum Thickness	$h_{min}$ (mm)	100	35	3,5

## APPLICATION

