

Plastová hmoždinka pre viazacie pásky TB



Výhody



- Na upevnenie káblov s viaz. páskou
- Priemer vŕtaného otvoru $\varnothing 6$ alebo $\varnothing 8$
- Bez halogénov
- Špeciálny samostrediaci krúžok pre ľahšie vloženie do diery
- Krídla na hlave pre lepšie upevnenie potrubia

Rozmery

TB šedé

\varnothing [mm]	H_1 [mm]	H_{nom} [mm]	L_D [mm]	Kód	[ks]	[ks]
8	45	37	43,5	98TB	100	1200

TB čierne

\varnothing [mm]	H_1 [mm]	H_{nom} [mm]	L_D [mm]	Kód	[ks]	[ks]
6	35	30	36,5	946TB	100	1.200
8	45	37	43,5	948TB	100	1.200
8	45	37	43,5	948ETB*	5.000	-

Čierna farba odolná voči UV žiareniu.
*Veľkoobjemové balenie.

Montáž




Vložiť hmoždinku




Upevnenie úderom



Vložiť pásku



Dokončiť montáž

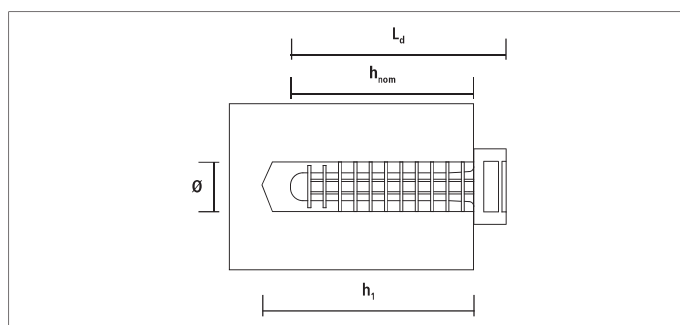

Blister

TB čierne

\varnothing [mm]	Kód	[ks]	[blister]	[ks]
8	48TB	25	15	375

Doporučené zaťaženie F_{Rec} [kN]

\varnothing [mm]	Betón [kN]	Pórobetón [kN]	Dutá tehla [kN]
8	0,14	0,07	0,045