



Key features

- Multidiameter.
- Adaptable to different fixing bases such as TBB, TBBB, BBT, TB, etc.
- Compatible with E2000PG and PVC channels.
- Temperature range from -40 °F to +185 °F continuously.
- Black color is UV resistant.
- Made of polyamide 6.6 V2 UL 94.
- Two colors available: natural and black RAL 900.
- Installation temperature from 14°F to +113 °F.

Approvals and certificates



Installation procedure




Insert the tip of the cable tie, tighten it manually (or with a tool) until the cables are completely fixed (or the product you are trying to knot), then cut the excess from the flange with a tool.

Breaking loads

Width (in)	Maximum recommenden load (lb)
0,09	17,63
0,14	39,68
0,18	48,50
0,29	121,25
0,34	176,37
0,35	176,37
0,49	242,50

Applications

For fixing plastic pipes for electrical and heating installations.

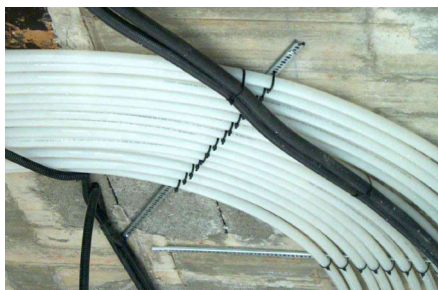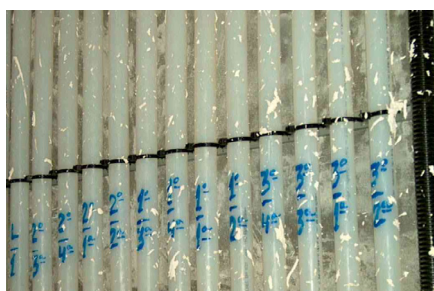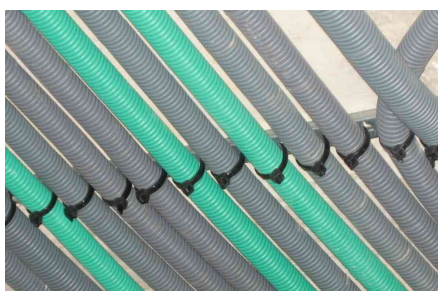

Storage

- It is recommended to store the cable tie in place with a temperature around 73,4 °F and a relative humidity of 50 %.
- Once the packaging is opened, it must be finished as soon as possible.
- Always close the bag after using the cable ties to maintain the correct humidity (our standard bag ensures that the water content in the product is constant).
- Do not store or expose the product directly to sunlight.
- Keep the product away from any heat source as they can affect the mechanical properties of the cable ties.

Main dimensions

Width (in)	Length (in)	Subjection range (in)
0,09	3,93	0,80
0,09	5,90	1,56
0,09	7,87	2,06
0,14	5,51	1,29
0,14	7,87	2,06
0,14	11,81	3,30
0,14	14,56	4,17
0,18	7,87	1,94
0,18	9,84	2,55
0,18	11,81	3,18
0,18	14,56	4,07
0,18	16,92	4,82
0,29	5,90	1,37
0,29	7,87	2,00
0,29	11,81	3,25
0,29	14,37	4,13
0,29	17,71	5,13
0,29	21,65	6,25
0,29	29,52	8,89
0,34	29,92	9,03
0,35	31,88	9,64
0,49	20,86	6,14
0,49	40,55	12,40